

## 1. Description


### 1.1. Project

Project Name	RTC
Board Name	RTC
Generated with:	STM32CubeMX 4.19.0
Date	03/22/2017

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48


## 2. Pinout Configuration

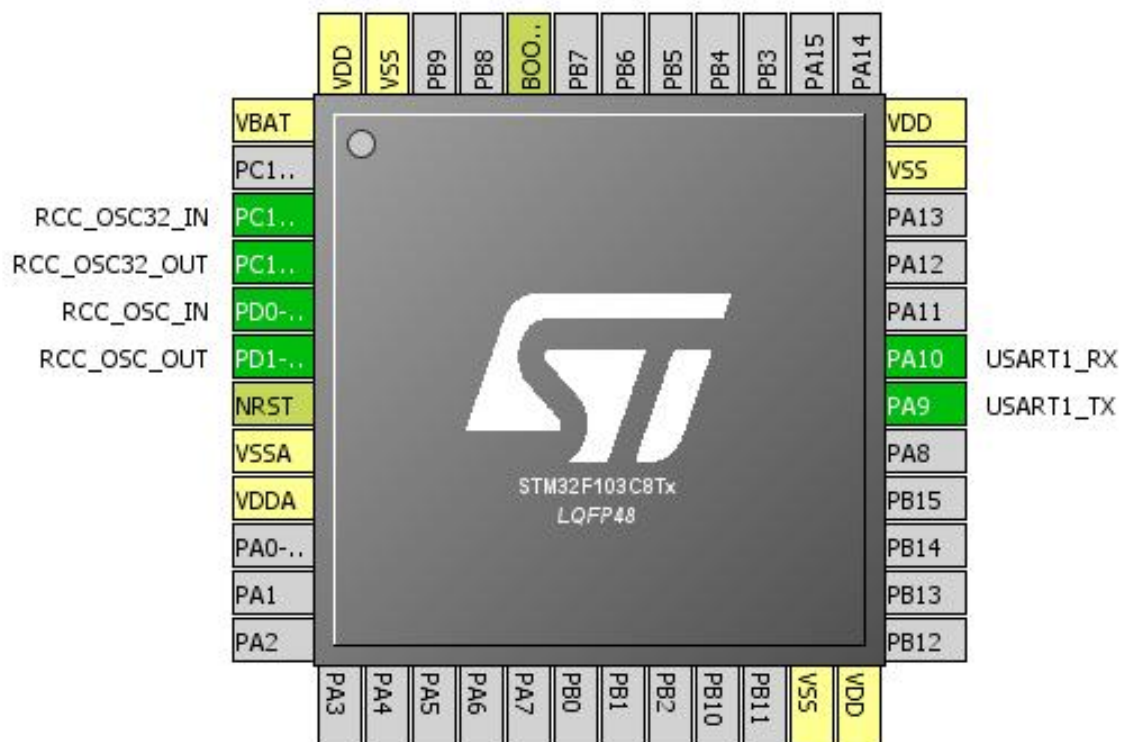

### 3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
23	VSS	Power		
24	VDD	Power		
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
35	VSS	Power		
36	VDD	Power		
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

## 4. Clock Tree Configuration

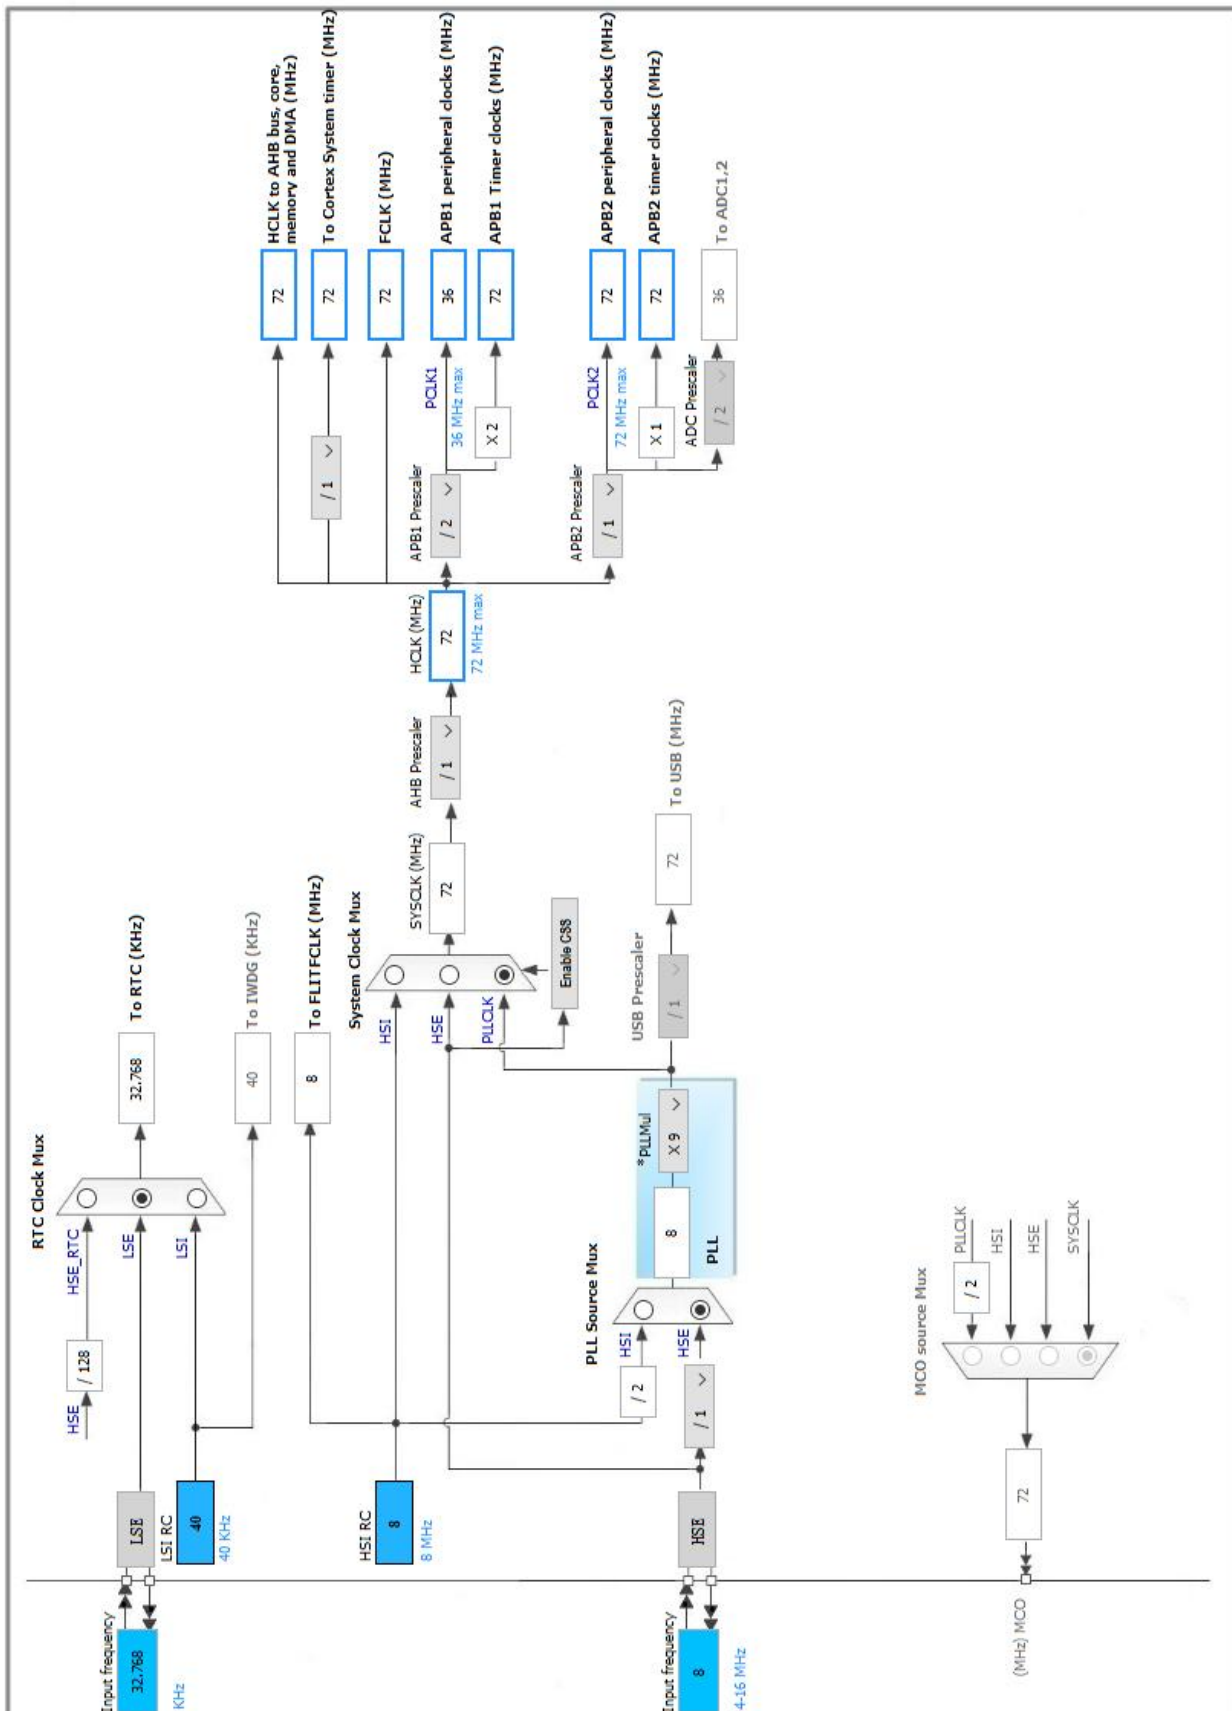

## 5. IPs and Middleware Configuration

### 5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

#### 5.1.1. Parameter Settings:

##### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

##### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 5.2. RTC

mode: Activate Clock Source

#### 5.2.1. Parameter Settings:

##### Calendar Time:

Data Format	BCD data format
-------------	-----------------

##### General:

Auto Predivider Calculation	Enabled
Asynchronous Predivider value	Automatic Predivider Calculation Enabled
Output	Alarm pulse signal on the TAMPER pin

### 5.3. SYS

Debug: No Debug

Timebase Source: SysTick

## 5.4. USART1

Mode: Asynchronous

### 5.4.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	

### 6.2. DMA configuration

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
RTC global interrupt	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART1 global interrupt	unused		

\* User modified value



## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	RTC
Project Folder	E:\Open103C-Demo-HAL\11.RTC\RTC
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.4.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No