

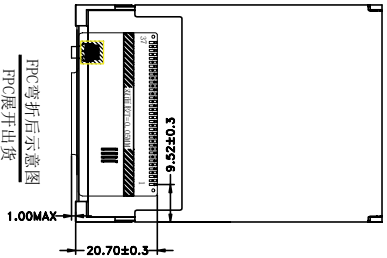
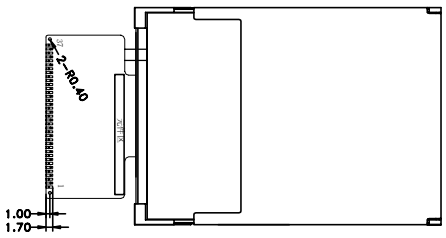
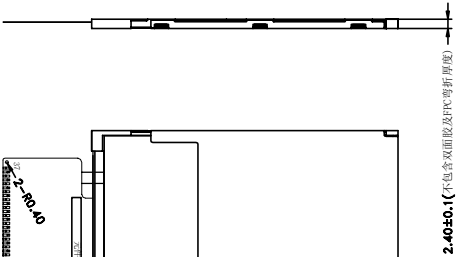


1	2	3	4	5	6	7	8

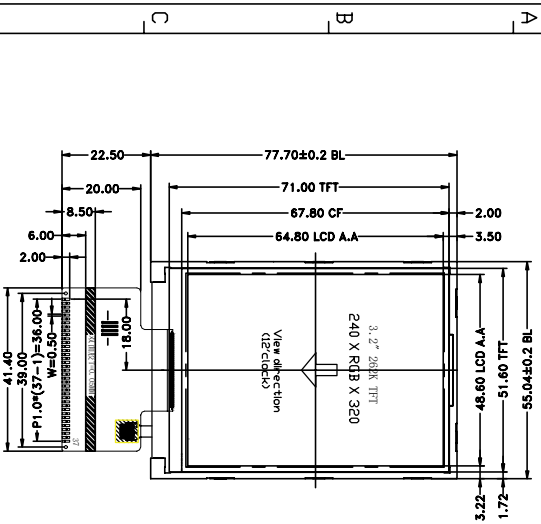

PIN DEFINATION			
No.	PIN NAME	No.	PIN NAME
1	GND	20	DB13
2	VCC(2.8V)	21	DB14
3	IDVCC	22	DB15
4	CS	23	DB16
5	RS	24	DB17
6	WR	25	GND
7	RD	26	YD
8	RESET	27	XR
9	DB1	28	YU
10	DB2	29	XL
11	DB3	30	LEDK1
12	DB4	31	LEDK2
13	DB5	32	LEDK3
14	DB6	33	LEDK4
15	DB7	34	LEDK5
16	DB8	35	NC
17	DB10	36	LEDA
18	DB11	37	IMO
19	DB12		

- NOTES:
1. DISPLAY TYPE: 3.2" TFT
 2. VIEWING DIRECTION: 12:00
 3. LCD DRIVE IC: IL19341V
 4. POLARIZER MODE: TRANSMISSIVE/POSITIVE
 5. OPERATING TEMP: -10° C~+60° C
 6. STORAGE TEMP: -20° C~+70° C
 7. UNMARKER TOLERANCE: ±0.20
 8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



TITLE.				REV.		UNIT		SIZE		(3)		CHECK		APPROVE		DRC DATE		2017-12-29	
MODEL.				1.0		mm		A4											

