

1. Description


1.1. Project

Project Name	STM32_HardWareI2C_MCP23017
Board Name	STM32_HardWareI2C_MCP23017
Generated with:	STM32CubeMX 4.25.0
Date	08/30/2018

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407ZGTx
MCU Package	LQFP144
MCU Pin number	144

2. Pinout Configuration

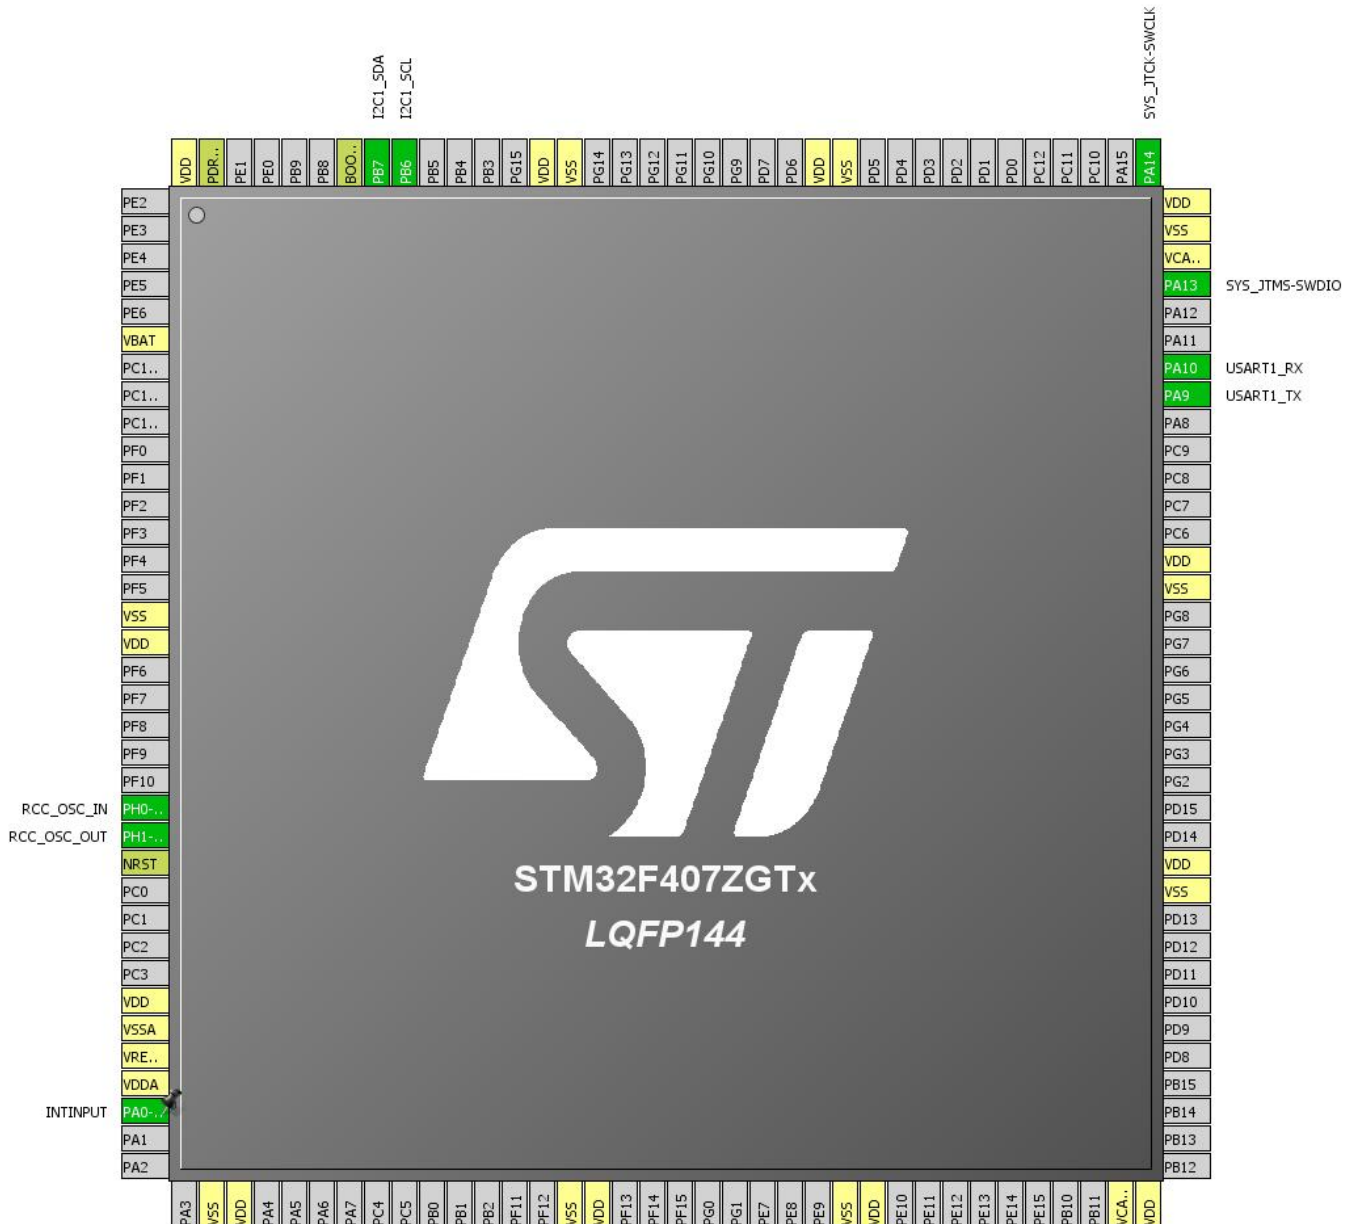


3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
16	VSS	Power		
17	VDD	Power		
23	PH0-OSC_IN	I/O	RCC_OSC_IN	
24	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
34	PA0-WKUP	I/O	GPIO_EXTI0	INTINPUT
38	VSS	Power		
39	VDD	Power		
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
71	VCAP_1	Power		
72	VDD	Power		
83	VSS	Power		
84	VDD	Power		
94	VSS	Power		
95	VDD	Power		
101	PA9	I/O	USART1_TX	
102	PA10	I/O	USART1_RX	
105	PA13	I/O	SYS_JTMS-SWDIO	
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
109	PA14	I/O	SYS_JTCK-SWCLK	
120	VSS	Power		
121	VDD	Power		
130	VSS	Power		
131	VDD	Power		
136	PB6	I/O	I2C1_SCL	
137	PB7	I/O	I2C1_SDA	

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
138	BOOT0	Boot		
143	PDR_ON	Reset		
144	VDD	Power		

4. Clock Tree Configuration

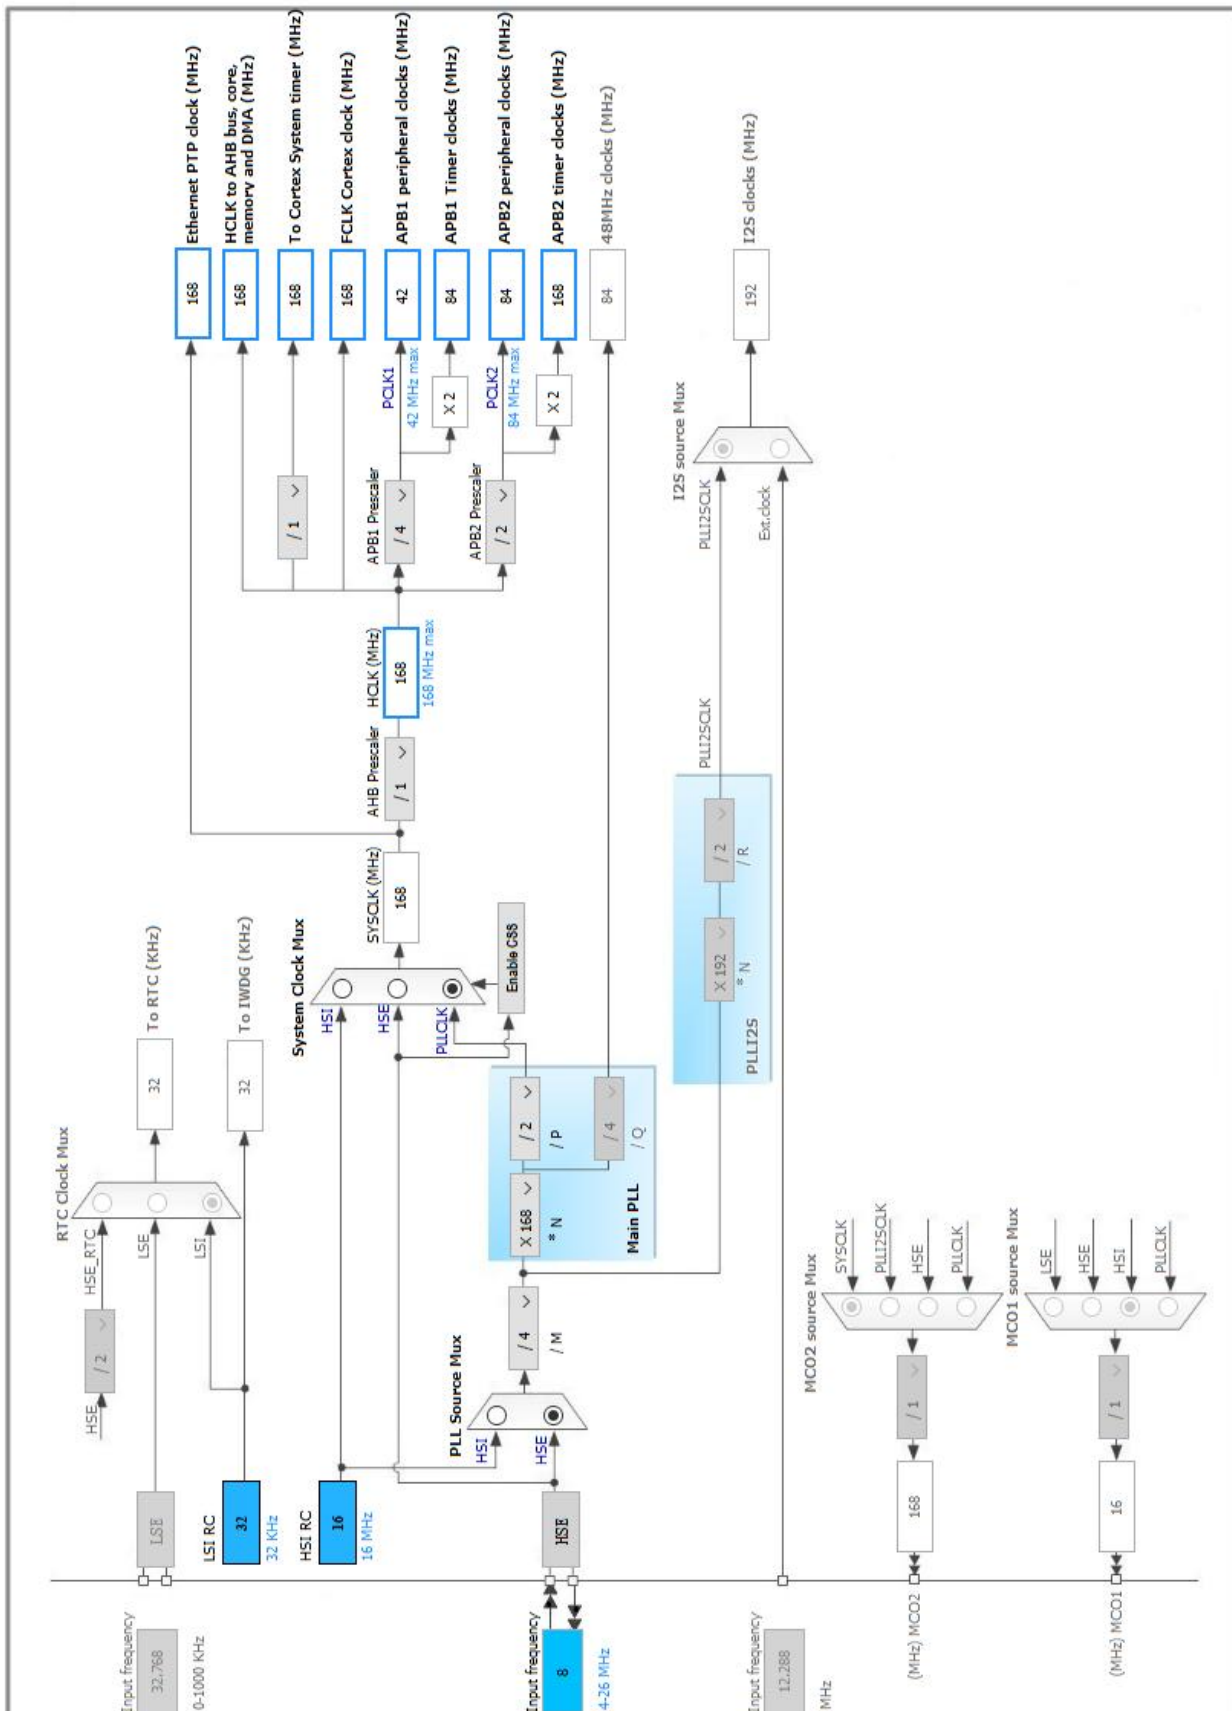

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

5.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

5.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.4. USART1

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	Very High *	
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	Very High *	
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	Very High *	
GPIO	PA0-WKUP	GPIO_EXTI0	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	INTINPUT

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
EXTI line0 interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
USART1 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407ZGTx
Datasheet	022152_Rev8

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	STM32_HardWareI2C_MCP23017
Project Folder	E:\Program\MODULE\MCP23017\STM32\STM32_HardWareI2C_MCP23017
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F4 V1.21.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report